


# Current Relay for DC- and AC-currents

AC/DC 0,1 - 10 A, 60 mV with external shunt

STW1000

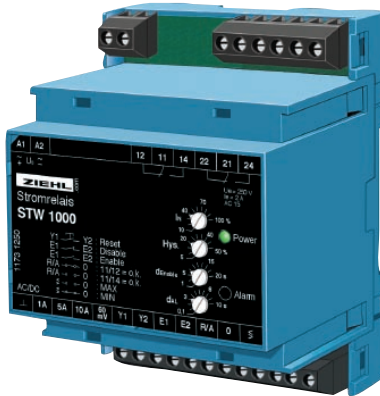

ZIEHL current-relays STW1000 have 4 measuring-ranges. They monitor most of the common AC- and DC-currents for over- or undercurrent.

Currents up to 10 A can be connected directly to the STW. For higher currents external transformers (to inputs 1/5 A) or Shunts (input 60 mV) can be connected.


- Measuring inputs 1 A, 5 A, 10 A, direct or via transformer
- Measuring input 60 mV for ext. Shunt
- Automatic detection of AC/DC
- Monitoring of over- or undercurrent
- Adjustable range 10...100%  $I_N$
- Hysteresis adjustable 5...50%
- Start-up delay 1...20s (input enable)
- Switching delay 0,1...10s for fading of short peaks
- Output-relay 2 changeover-contacts (co)
- Operating- or closed-circuit-mode for relays selectable with bridge

- Universal supply-voltage AC/DC 24-240 V
- Interlocked switching selectable with bridge
- LEDs for display state of relay
- Housing for mounting in switchgear cabinets or fuse boxes, 70 mm wide, mounting height 55 mm
- option: other supply voltages

Order-number

AC/DC 24-240 V

**S225684**

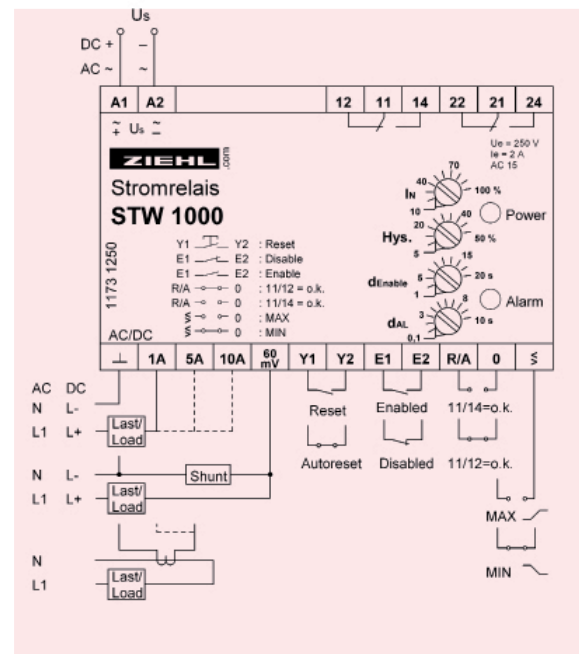

## Technical Data

supply voltage  $U_s$

AC/DC 24-240 V, <3W, <5VA  
(AC 20-264 V, DC 20,4...297 V)

relay output  
type of contact  
test conditions

2 change-over contacts  
**type 2** see "general technical informations"  
siehe "general technical informations"

function  
frequency of measured current  
internal resistance  
overload capacity/continuously  
max. 10s

Over- or undercurrent, DC or AC (1-phase)  
0 / 40 ... 400 Hz  
60 mV: 40 k $\Omega$ , 1A: 0,1  $\Omega$ , 5A: 20 m $\Omega$ , 10 A: 10 m $\Omega$   
60 mV: 10 V, 1A: 2 A, 5A: 7,5 A, 10 A: 11 A  
60 mV: 10 V, 1A: 5 A, 5A: 15 A, 10 A: 20 A

switching point  
hysteresis  
error of setting  
repeat error  
temperature-dependence  
start-up-delay  $t_{enable}$   
switching delay  $t_{dal}$

adjustable 10...100%  $I_N$   
adjustable 5...50% of switching point  
< 10%  
 $\pm 0,2\%$   
 $\leq 0,05 \% / K$   
adjustable 1...20 sec.  
adjustable 0,1...10 sec.

rated ambient temp. range

-20°C...+55°C

dimensions (h x w x d)  
attachment

design V4: 90 x 70 x 58 [mm]  
on 35 mm DIN-rail according to EN 60 715 or  
with screws M4

protection housing/terminals  
weight

IP 30 / IP 20  
ca. 180 g