


Level Monitor Type NS20

1 Level and MIN / MAX-Control

NS20

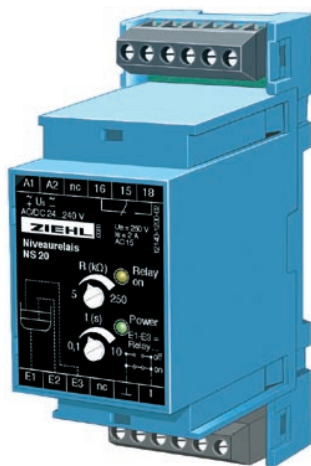

Lever-Relays NS20 for conductive liquids can be used as monitors for 1 Level and for controlling a level between 2 electrodes.


- 3 elektrodes for MIN/MAX-control
- 2 elektrodes (E2 open) as level-monitor
- Sensitivity adjustable 5 kΩ...250 kΩ
- LED for state of relay
- Function of relay reversible (picks up or releases at top electrode)
- Switching-delay adjustable 0,1 ... 10 s
- Universal supply-voltage AC/DC 24-240 V

Applications as level-monitor: Protection from running dry or overflow, seal-monitoring of submersible pumps for leaks, detection of leaks.


Applications Min/Max: Controlling a level between minimum (elektrode E2) and maximum (E3). As long as E3 is dry, a magnetic valve is opened (or a pump is running) and liquid is influenting. As soon as maximum (E3) is reached, the NS 20 closes the valve. When the level falls below E2, the cycle starts new. In reverse also discharging of a container can be controlled.

Order-number **V223440**

Überwachung Flüssigkeitsstand mit 1 Elektrode (E3 benetzt, Relais an 15-18 geschlossen)
monitoring of liquid with 1 electrode (E3 dipped, relay on 15-18 closed)

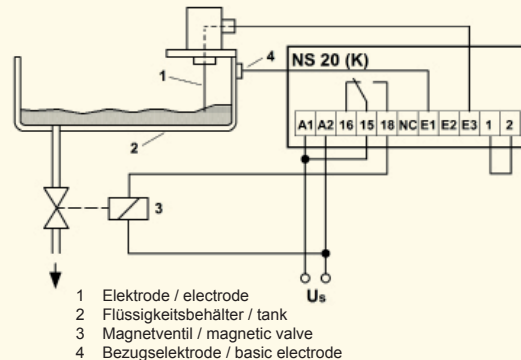

Zulaufsteuerung mit 2 Elektroden (E3 benetzt, Relais aus 15-16 geschlossen)
filling tank with 2 electrodes (E3 dipped, relay off 15-16 closed)

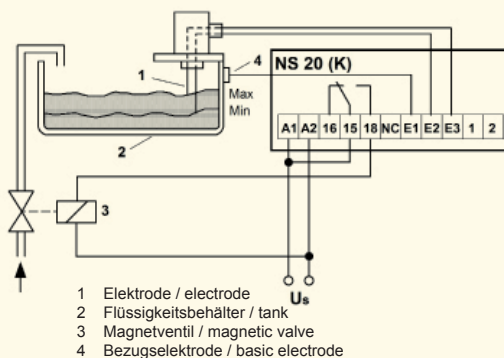

Technical Data

Supply voltage U_s AC/DC 24-240 V, 0/50/60 Hz, <2W, <3VA
(DC 20,4-297 V, AC 20-264 V)Relay
Contact
Switching delay1 change-over-contact (co)
type 2 (see "general technical informations")
adjustable 0,1...10 sTest conditions
Rated ambient temperature rangesee "general technical informations"
-20°C...+55°CNumber of electrodes
Voltage at electrodes2 or 3 (with 2 electrodes: E2 not connected)
< AC 6 V_{eff}Line capacity at 5 kΩ
at 150 kΩ
at 250 kΩmax. 500 nF = app. 2500 m
max. 20 nF = app. 100 m
max. 10 nF = app. 50 mDimensions (h x w x d) mm
Attachment
Protection housing/terminals
Weightdesign V2: 90 x 35 x 58 mm, mounting height 55 mm
on 35 mm DIN-rail or with screws M4
IP 30/ IP 20
app. 100 g